


66HF

OROS


Fresa Z6 ad Avanzamento Rapido

Fresa in metallo duro integrale, Z6

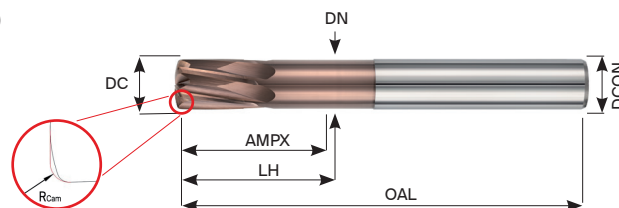

66HF	DC h10	OAL	DCON h6	APMX	DN	LH	RCAM
GAMBO HA - Rivestito							
66HF.060061860SA	6	60	6	18	5,7	18	0,55
66HF.060062460SA	6	60	6	24	5,7	24	0,55
66HF.080082464SA	8	64	8	24	7,7	24	0,74
66HF.080083264SA	8	64	8	32	7,7	32	0,74
66HF.080084075SA	8	75	8	40	7,7	40	0,74
66HF.100103075SA	10	75	10	30	9,7	30	0,92
66HF.100104075SA	10	75	10	40	9,7	40	0,92
66HF.1001050100SA	10	100	10	50	9,7	50	0,92
66HF.120123675SA	12	75	12	36	11,6	36	1,11
66HF.1201248100SA	12	100	12	48	11,6	48	1,11
66HF.1201260100SA	12	100	12	60	11,6	60	1,11
66HF.1601648100SA	16	100	16	48	15,5	48	1,47

Ideale per:

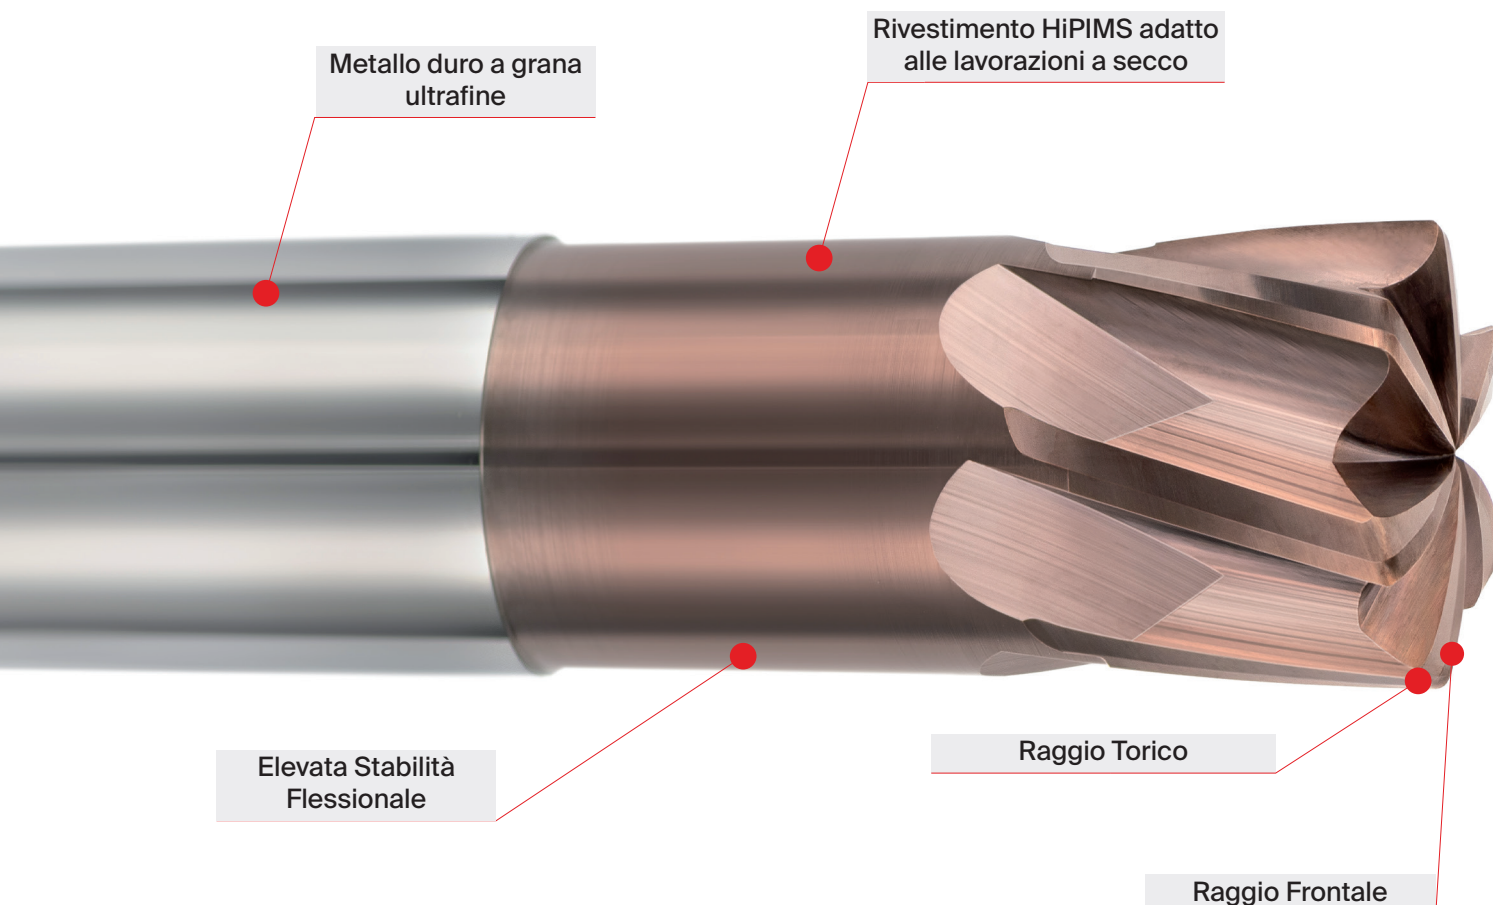

CERIN