



Fresa Z4 - Corta

Fresa in metallo duro integrale HPC con elica destra
Rivestimento Cer-SA

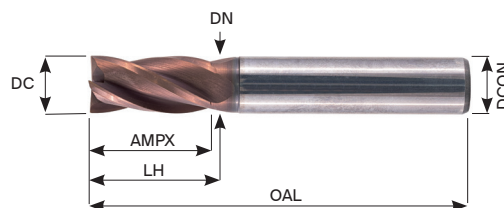

740	740W	DC h10	OAL	DCON h5	APMX	DN	LH
Gambo HA	Gambo HB						
740.030060650SA	740W.030060650SA	3	50	6	6	2,9	9
740.040060954SA	740W.040060954SA	4	54	6	9	3,8	12
740.050061054SA	740W.050061054SA	5	54	6	10	4,8	16
740.060061154SA	740W.060061154SA	6	54	6	11	5,8	16
740.080081454SA	740W.080081454SA	8	54	8	14	7,7	20
740.100101766SA	740W.100101766SA	10	66	10	17	9,5	24
740.120122073SA	740W.120122073SA	12	73	12	20	11,5	26
740.160162682SA	740W.160162682SA	16	82	16	26	15,5	32
740.180182984SA *	740W.180182984SA *	18	84	18	29	17,5	34
740.200203292SA	740W.200203292SA	20	92	20	32	19,5	40

* disponibili su richiesta

Ideale per:

P
Acciaio



M
Acciaio
Inossidabile

K
Ghisa

S
Superleghe

Fresa Z4 - Standard

Fresa in metallo duro integrale HPC con elica destra
Rivestimento Cer-SA

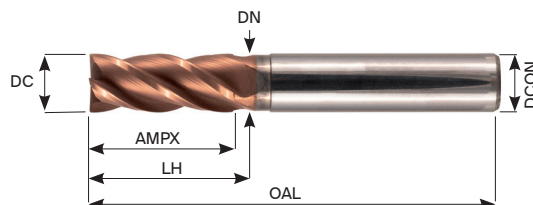

740	740W	DC h10	OAL	DCON h5	APMX	DN	LH
Gambo HA	Gambo HB						
740.030060957SA	740W.030060957SA	3	57	6	9	2.9	14
740.040061257SA	740W.040061257SA	4	57	6	12	3.8	18
740.050061457SA	740W.050061457SA	5	57	6	14	4.8	19
740.060061457SA	740W.060061457SA	6	57	6	14	5.8	20
740.080082163SA	740W.080082163SA	8	63	8	21	7.7	25
740.100102472SA	740W.100102472SA	10	72	10	24	9.5	30
740.120122883SA	740W.120122883SA	12	83	12	28	11.5	35
740.140142883SA *	740W.140142883SA *	14	83	14	28	13.5	35
740.160163692SA	740W.160163692SA	16	92	16	36	15.5	40
740.1801836100SA *	740W.1801836100SA *	18	100	18	36	17.5	50
740.2002042104SA	740W.2002042104SA	20	104	20	42	19.5	50
740.2502548125SA *	740W.2502548125SA *	25	125	25	48	24.2	65

* disponibili su richiesta

Ideale per:

P
Acciaio

M
Acciaio
Inossidabile

K
Ghisa

S
Superleghe